

The Swing Racks are a family of open wall-mounted 19" EIA racks available in three heights. Swing Racks are copper and fiber ready, are easy to install, and provide easy access to the front and rear of equipment. Use Swing Racks to store network, communications and security equipment in telecommunication and equipment rooms or in other rooms where floor space is limited.

Swing Racks support 19" EIA rack-mount equipment and single-sided shelves. Equipment mounts on a hinged gate. The gate has single-sided rack-mount rails with roll-formed 12-24 threads for attaching equipment. The gate swings open to provide easy access to the rear of equipment during service work. The gate is secured in the closed position with a removable pin that latches through the wall-mount frame.

---



## Features

- Swing-out rack-mount frame provides easy access to the rear of installed equipment
- Opens 180 degrees to right or left
- Fiber and copper ready
- Up to 85 lbs. [38 kg.] load rating
- 19" EIA threaded 12-24 equipment mounting rails
- Durable all-steel construction

## Paint/Finish

Our products are finished in textured powder paint. Powder coating provides a durable high-quality finish.

## Load Rating

Weight capacity is dependent on secure mounting into proper structure.

## Industry Standards



EIA 310-D

# Swing Racks



## Easy Ordering Part Numbers

Catalog Number	Rack Units	Overall Dimensions H x W x D in. [mm]	Weight Capacity lbs. [kg.]
DWMSR-12U	12U [2 ft.]	22.25" x 19.38" x 18.00" [565 x 493 x 457]	85 lbs. [38 kg.]
DWMSR-18U	18U [3 ft.]	32.75" x 19.38" x 18.00" [832 x 493 x 457]	85 lbs. [38 kg.]
DWMSR-24U	24U [4 ft.]	43.25" x 19.38" x 18.00" [1098 x 493 x 457]	85 lbs. [38 kg.]



## Technical Specifications

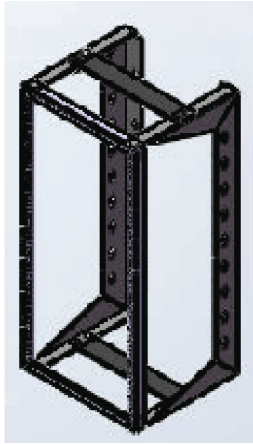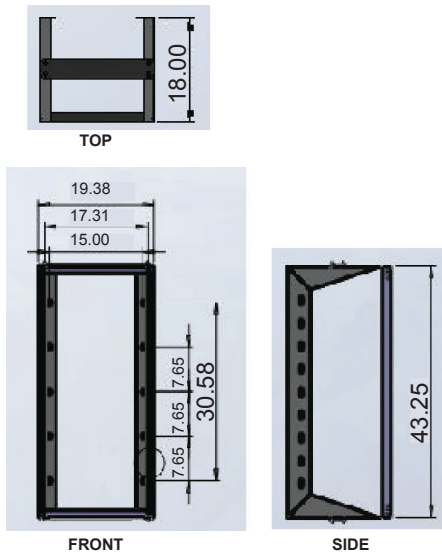

24U

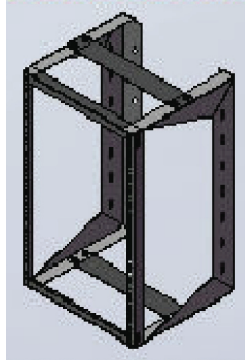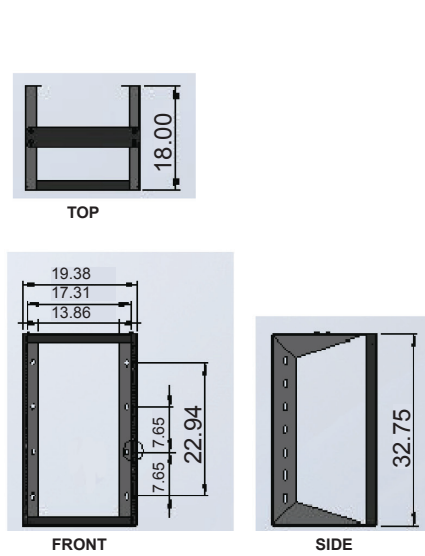

18U

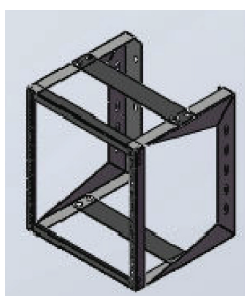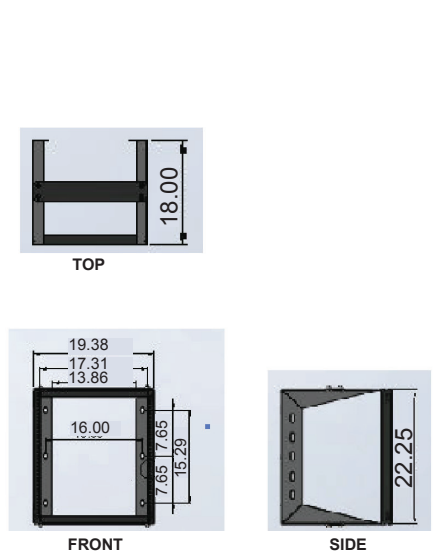

12U